

ReadyLog

Phone Recording Server

Model:RL-S001-8G

Legal Telephone Voice Recording is being very important these days for customer service support, banks and financial institutions, security, transportation industry, educational and training, journalism, health sector, police emergency, defense industry and call center etc. Business house can deliver better customer service after listening recorded conversations with customers.

ReadyLog is stand-alone embedded Telephone Call Recording Device. Software is Built-in, it does not require any PC or installing any driver. Inbound or outbound telephone calls can be recorded by schedule recording or automatic channel recording. ReadyLog is plug and play device which can easily setup, record calls, download files and monitor it. One of the unique feature of this device is **REAL TIME or LIVE CALL MONITORING** using internet.


ReadyLog comes with 8GB Built-in flash storage. More than 240 hours single PSTN line can be recorded. Device supports AGC to make sound clear and does not affect call quality of PSTN line. When system disk is full, the system will automatically delete first audio files to ensure that the system can record continuously. And there is My Zone and Preservation Zone to save recorded data file from deleting.



ReadyLog RL-S001

Key Features:

- User friendly to setup, record calls, download and monitor
- Stand-alone, no PC is required
- Built-in user friendly Web GUI
- Robust embedded design recorder for single telephone line
- Software built-in, no driver is required
- Record inbound and outbound both calls
- Support automatic channel recording, schedule recording and manual recording
- More than 240 hours telephone conversation can be recorded
- Support Real Time remote call monitoring
- 8GB storage Built-in and 1x USB slot for external USB storage backup
- Support WAV file format
- Can use 24 hours a day and 7 days a week
- Energy saving ,consume less power
- Support caller ID signal type DTMF, FSK
- Support AGC to make sound clear
- Support telephone line voltage measurement function and can use in any telephone line
- Support web base firmware upgrade

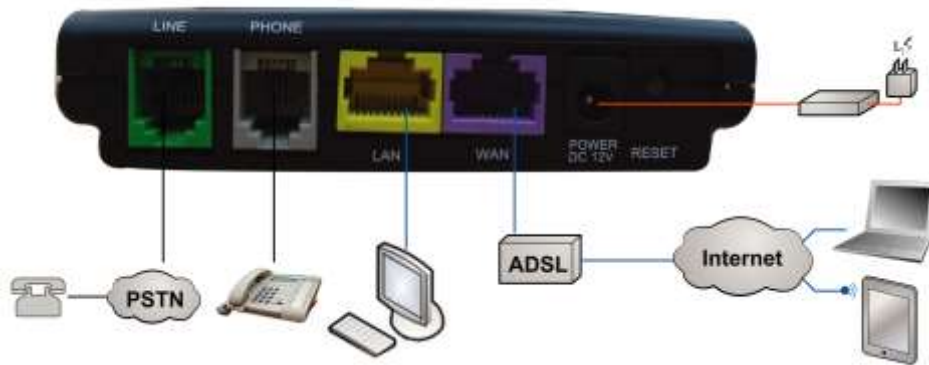

Application Diagram

CONNECTING DEVICE:

- Connect LAN port of ReadyLog to LAN port of your PC or Notebook.
- Connect WAN port of ReadyLog to ADSL/Internet.
- Connect PSTN line to LINE Interface of ReadyLog.
- Connect PHONE Interface of ReadyLog to telephone set.

Technical Specification:

Model	RL-S001-8G
Description:	ReadyLog Phone Recording Server
Hardware:	<ul style="list-style-type: none"> 1x USB port for external USB storage backup 1x LAN port to connect PC/Notebook 1xWAN port to connect internet RESET push button 1xLINE port and 1x PHONE port
LED	POWER, STATUS,ONLINE,WAN,LAN,ACTIVE,STORAGE
Resetting	RESET button
Power:	DC12V,0.5A
Storage:	8GB flash disk internally Built-in
Software:	Software is built-in. No driver is required.
Weight:	0.5Kg
Dimension	104x84x27mm
Accessories	Power Adapter, LAN cable, RJ11 cable
Certification	CE, Comply RoHS

Ordering Information:

Model	Storage	Recording PSTN Line
RL-S001-8G	8GB flash disk Built-in	1 line

-Note:

- Please use IE Internet Browser (Supports IE Browser only).
- Download ActiveX.
- For external USB backup, use FAT32 format USB storage.

We reserve the right of technical modifications.

Online Download:
<http://www.allwin.com.tw/eng>